



Building Performance Equipment, Inc.®

Sustainable, Reliable, and Energy Efficient Ventilation Systems



Model: BPE-SC-UNI-2000 (Air-to-Air Energy Recovery Ventilator)





- Model Number:** BPE-SC-UNI-2000, Energy Recovery Ventilator (ERV)
- Energy Transfer:** Polymer Fixed Plate, Heat and Humidity Transfer
- Air Flow Range:** 500-2250 CFM
- Energy Efficiency Ratio (EER) – (Btu/W):** (ARI 1060 at 95°) - Summer = 35.4 (Dep. on Fan)
(ARI 1060 at 10°) - Winter = 82.4 (Dep. on Fan)
- Net Weight:** 202 lbs.
- Dimensions:** 101" L x 24" W x 32.5" H
- External Finish:** Galvanized Steel Sheet
- Typical Fan:** BPE-2000 Integral Fan
- Power Source:** 115 V - Single Phase - 60 Hz
- Power Consumption** 9A @ 115 VAC
2016 CFM @ 0.0" W.C.

Note: For use in conditions below -10°F and/or 40% relative humidity, contact BPE for application assistance. Interior aligned with Reflectix Semi-Rigid Insulations (R-5 RMAX)

Note: BPE-ERMS can be purchased without fans for locations with existing fans

Note: Refer to charts for ERM core and duct static pressure

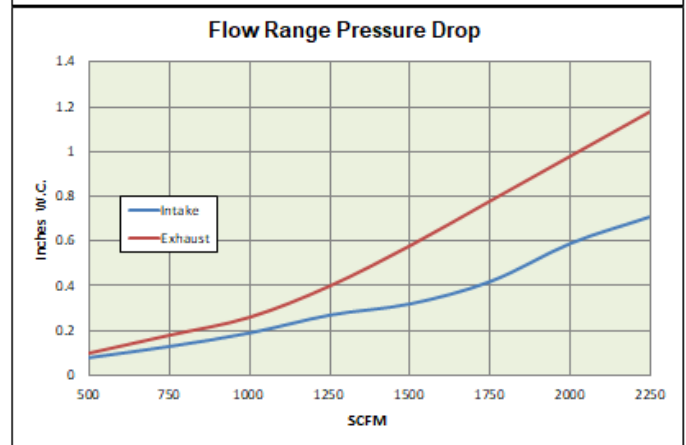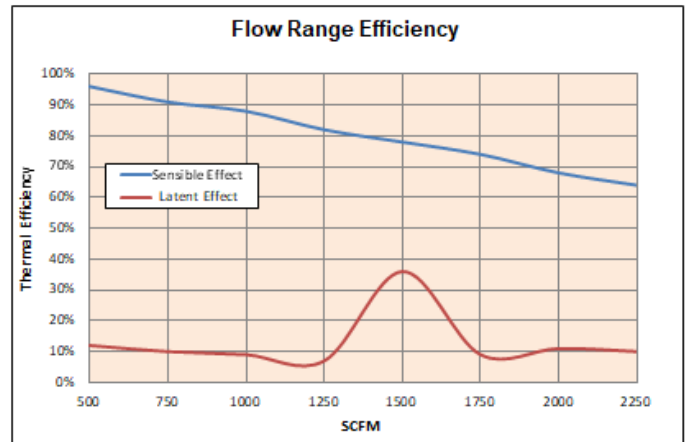

ARI 1060 Testing

Project Name: _____

Date: _____


Location: _____

Application: _____

Contractor: _____

Design Conditions	Outdoor Air				Indoor Air				Thermal Efficiency	
	CFM	In. W.C.	°F WB	°F DB	CFM	In. W.C.	°F WB	°F DB	Sensible (%)	Latent (%)
Summer										
Winter										

Component	Intake (in. W.C.)	Exhaust (in. W.C.)	Notes
Louver			Drain Connection (Left, Right, Field Installed):
Filter			
Duct work			
ERV			
Diffuser			Regenerative Condensate Return (Wick, Gap or Total Seal – No Latent 0.0%):
Total Static			
Add 25% - Safety Factor			
Fan Static			Special Considerations:
Fan CFM			
Fan Manufacture			
Fan Model			

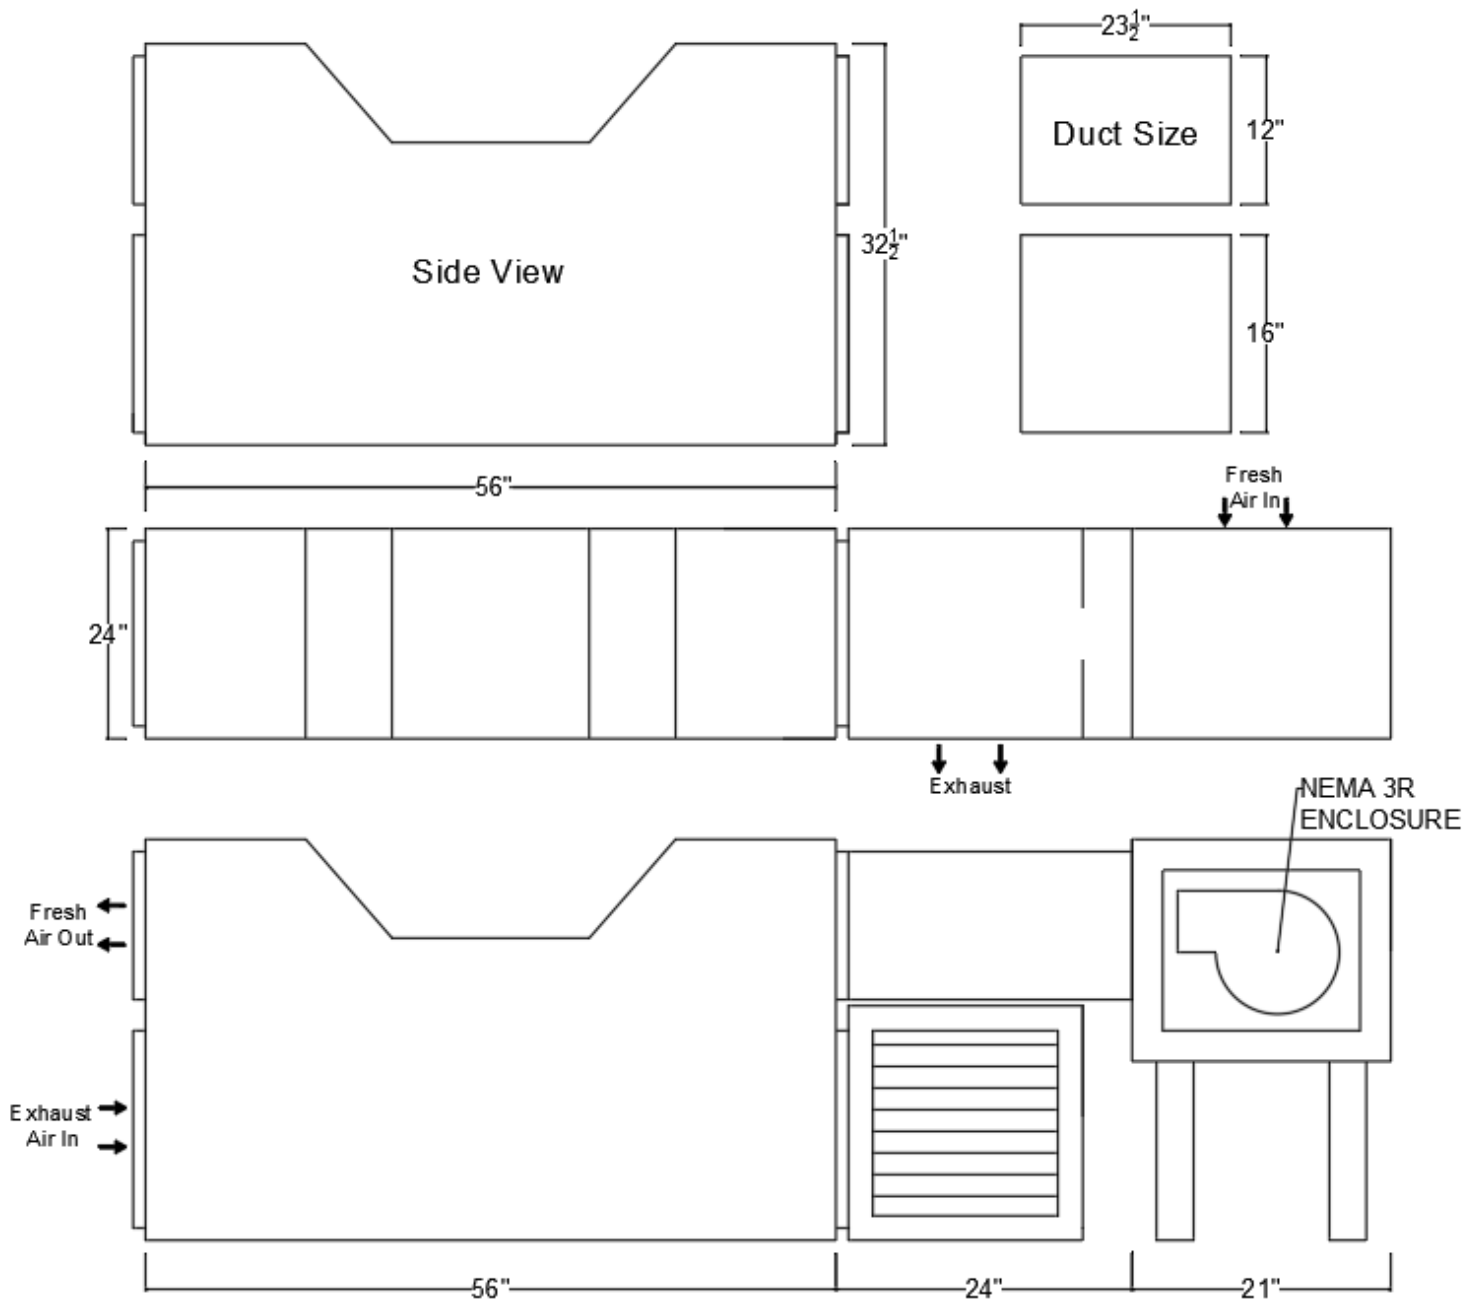

Note: Dimensions in inches and methods of manufacturing are subject to change without notice.